



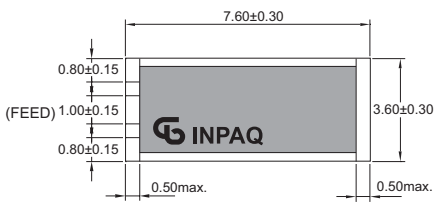
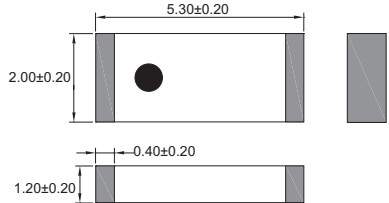


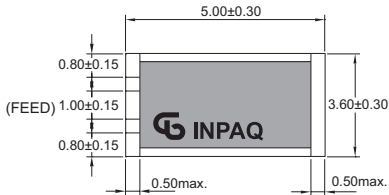


Application	Bluetooth, WLAN	
Product Name	ACA7636	ACA5320
Appearance	 	 
<b>Specifications</b>		
Frequency Band (MHz)	A= 2400 ~ 2500	A= 2400 ~ 2500
V.S.W.R.	<2	<2
Polarization	Linear	Linear
Peak Gain	2.5dBi typ.	0~1dBi typ.
Impedance ( $\Omega$ )	50 typ.	50 typ.
Matching Circuit	Pi matching circuit will be required to have optimized performance	
<b>Package (pcs/reel)</b>		
Standard Packing Quantity	2,000pcs	3,000pcs
Dimensions (mm)	7.6 x 3.6	5.3 x 2.0
		

\* All value are defined at 25±15°C , 65±20 % RH

<b>Application</b>	Bluetooth, WLAN
<b>Product Name</b>	ACA5036
<b>Appearance</b>	 
<b>Specifications</b>	
<b>Frequency Band (MHz)</b>	A= 2400 ~ 2500
<b>V.S.W.R.</b>	<2
<b>Polarization</b>	Linear
<b>Peak Gain</b>	2.5dBi typ.
<b>Impedance (Ω)</b>	50 typ.
<b>Matching Circuit</b>	Pi matching circuit will be required to have optimized performance
<b>Package (pcs/reel)</b>	
<b>Standard Packing Quantity</b>	2,000pcs
<b>Dimensions (mm)</b>	5.0 x 3.6
	

\* All value are defined at 25±15°C , 65±20 % RH